



The high technology in KVM switch

IS Series LCD KVM

Instruction

The IS LCD KVM is an IP-based KVM control unit that allows both local and remote operators to monitor and access multiple computers from multiple consoles. Every IS LCD KVM can manage up to 8/16 computers and control from remote through network. It supports PS/2 or USB ports of keyboard and mouse. Besides, this LCD KVM Switches is characterized by its Easy Installation Rack Mount Kit, which streamlines the rack mounting process. It is easy for single person to setup and dismantle.



Features

Remotely access computers via the LAN, WAN, or Internet - control your installation when and where you want

Support PS/2 or USB ports of keyboard and mouse

The screen can be lock and unlock by itself when you pull and push

Integrate with keyboard, touchpad, LCD Monitor and KVM Switches

Port Selection via pushbutton and OSD

Daisy Chain style. More 31pcs KVM, at most 512pcs computers under management

Security Mode (Password setting)

Built-in Keyboard (104 keys)

19" 1U high rack mountable, single slide rails

Support operation system: Windows 2000、Windows XP、Windows Vista、LINUX

| Model Function | | IS-1708A | IS-1716A |
|-----------------------------------|----------------|--|--------------------|
| Computer Connectors | Direct | 8 | 16 |
| | Max | 256 (Daisy Chain) | 512 (Daisy Chain) |
| Connect port | Connect port | 8 x DB-15F | 16 x DB-15F |
| | Chain port | 1 x DB-15F | 1 x DB-15F |
| Keyboard Mouse signal style | | PS/2 and USB combo | PS/2 and USB combo |
| Display OSD language | | 7 kinds | 7 kinds |
| KVM OSD language | | 8 kinds | 8 kinds |
| Scan interval(OSD option) | | User Specified : 5-99 sec | |
| LCD | Resolution | 17" LCD: 1280 x 1024; DDC2B | |
| | Contrast Ratio | 17" LCD: 300cd/m ² &800 : 1 | |
| Input pressure | | 100V-240V 47-63Hz | |
| Power | | 30W | |
| Operating Temperature | | 0℃ ~ 50℃ | |
| Storage Temperature | | -20 ℃ ~ 60℃ | |
| Humidity | | 0~80% RH | |
| Material | | Metal | |
| color | | black | |
| Weight | | 14.2 kg | 14.4 kg |
| dimension (L× W× H) | | 630mm× 480mm× 44mm(19"1U) | |
| the range of rack mount kit depth | | 635mm-1030mm | |

Rack mounting demonstration

Dimension

IS Series installation

one person installation as Easy Three steps !


- 1 Fix the slider rack mount brackets to the 19" cabinet rails
- 2 Slide the KVM switch into the brackets



- 3 Mount the unit to the brackets using quick-release fastener. Then Slide it out and get to work.



www.evak.cn

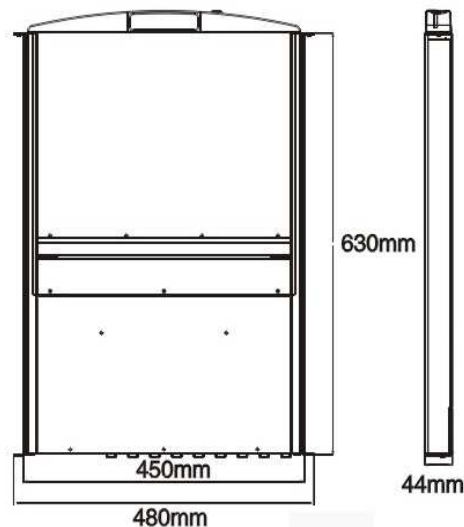

IS series model

IS-1708A 17"TFT/Keyboard/Touchpad/100V-240V AC Input/8port PS/2 and USB Switch

IS-1716A 17"TFT/Keyboard/Touchpad/100V-240V AC Input/16 port PS/2 and USB Switch

Remark: Over IP module IP-2000 is optional accessory

Ordering information (The specification and pictures are subject to change without notice)

EVAK Technology established in 2003, EVAK Technology Co., Ltd has grown into one of the leading manufacturers of KVM switches and portable rugged computers in China. During the last few years, EVAK has been dedicated to providing quality products as well as OEM/ODM solutions for the customers all over the world. Now the EVAK branches and offices are spread over China, including Beijing, Shanghai, Nanjing and Shenzhen.

Certificated Green Partner of SONY

Because of competitive price, high quality and prompt delivery, our products are widely used in telecommunication, electric power, bank, securities, military, inspection and control industries. EVAK is not only an CE/FCC certified manufacturer, but also the certified green partner of Sony in 2006.